

# Miniature Capsule Slip Ring LPM-12N

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It is also called a rotary electrical interface, commutator, collector, swivel or an electrical rotary joint.

The LPM-12N miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-12N allows tremendous flexibility in dealing with system size restrictions. It is available in 4, 6 and 12 circuit configurations.



Specifications				
Operating Speed	0-300 rpm			
Number of Circuits	12			
Voltage	240 VAC/DC			
Current Rating	2 amps per circuit			
Temperature Range	-20°C to +60°C			
Contact Material	Precious Metal			
Lead Size	30# silver plated copper			
Lead Length	Stator: 100mm Rotor:100mm			
Electrical Noise	≤35 mΩ(50 rpm)			
Housing Material	Plastic			

Capsule Length					
# of Circuits	L (mm)	Part No			
12	20.2	LPM-12N			

### The operating life of the unit depends upon temperature, rotation speed and environment.

The operating life ≥50,000,000 runs ref.

## **Features**









- ✓ 12 circuits models
- ✓ 2 amps per circuit ,240VAC/DC
- ▼ Precision assembly to provide exceptional rotational life
- ✓ Speed up to 300 rpm continuous
- **✓** Gold-Gold contacts
- **▼** Flexible, color-coded, silver-plated, lead wires
- ✓ Superior handling of low level control signals
- Metal housing optional



TEMPE
-20° C to 60° C



MAXIMUM OPERATING SPEED 0-300 RPM

## **Applications**

- ✓ Electrical test equipment
- ✓ Manufacturing and process control equipment
- ✓ Indexing tables
- ✓ CCTV pan / tilt camera mounts
- **▼** Robotics, rotary sensors, urgent illumination equipmen
- Exhibit / display equipment/Closed-circuit control
- ✓ Aviation ,military ,instrument, medical equipment.
- **▼** Min-type wire-rolling machine / Wind turbine generator



+1 346-320-9106 sales@slipring.cn



# **Advantage**



- **▼** Low torque minimize system torque budget
- **▼** Compact design to fit in the most demanding space.
- **▼** Smooth running
- ✓ Low electrical noise
- **▼** Quick shipment per your urgent requirement
- **✓** 360 continuous rotation
- ✓ High bandwidth transfer capability
- **✓** Addition of special components
- **✓** Quick shipment


Wre Color Code										
Wire Size	Ring #	Color	Ring#	Color	Ring #	Color	Ring#	Color		
AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG		
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR		
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY		
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG		
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR		
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN		

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

# **Drawings**

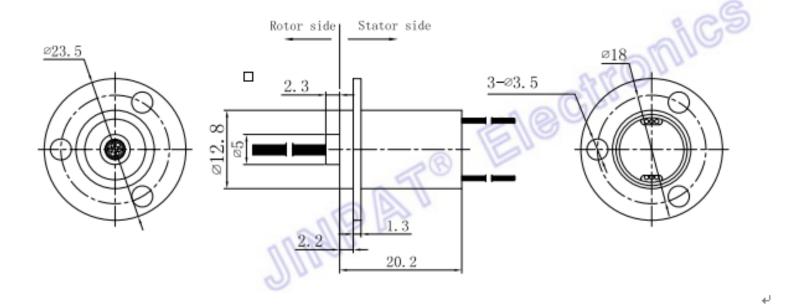

### **MESSAGE**

Any questions about slip ring, please leave your message to get a professional solution

### PRODUCT CATEGORY

FORJ

Capsule slip ring
Through bore slip ring
Pancake slip ring
Mercury slip ring
Separate slip ring
Miniature slip ring
Wind turbine slip ring
Hydraulic slip ring
Pneumatic slip ring
Coaxial rotary joints

### REQUESTS

Circuits
Current&voltage
Signal details
Dimension
Working speed
Working temperature
Operating
Environment
Other

### **INDUSTRIES**

Surveillance Crane

Medical

Marine Defence

Radar antenna

Automation

Meter and instrument Wind turbine generator

VR Device

Other





+1 346-320-9106 sales@slipring.cn